

# PS300

## Pump control valve

### APPLICATION

Pump control valves of this type are used as a protection valve in pressure boosting systems to provide a water hammer free shutdown and start-up of pumps.

### APPROVALS

- DVGW
- WRAS (up to 23 °C)

### SPECIAL FEATURES


- High flow capacity
- Powder-coated inside and outside - Powder used is physiologically and toxicologically safe
- Integral control circuit and ball valves
- Integral fine filter
- No external energy required for operation
- Compact construction
- Light weight



### TECHNICAL DATA

<b>Media</b>	
Medium:	Drinking water
<b>Connections/Sizes</b>	
Connection size:	DN50 - DN450
<b>Pressure values</b>	
Max. operating pressure:	16 bar
Nominal pressure:	PN16
Minimum pressure:	0.5 bar
<b>Operating temperatures</b>	
Max. operating temperature medium:	80 °C
<b>Specifications</b>	
Magnetic solenoid pilot valve:	24 V AC, IP65 230 V/50 Hz on request

## CONSTRUCTION

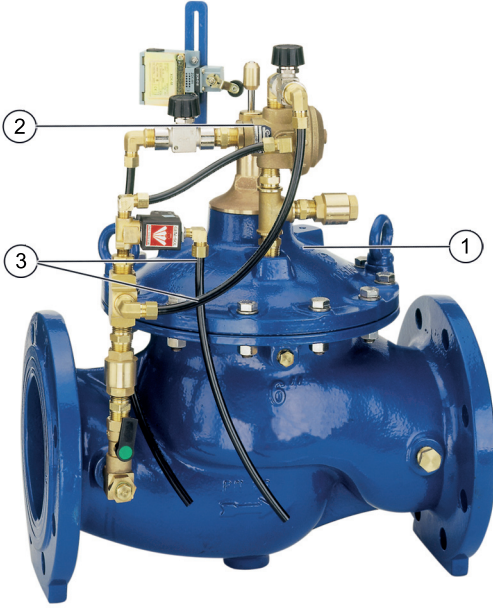Overview	Components	Materials	
	<b>1</b>	Housing with flanges acc. to ISO 7005-2 / EN 1092-2	Ductile iron (ISO 1083), powder-coated
	<b>2</b>	Magnetic solenoid valve	Brass
	<b>3</b>	Control circuit with integral rinsable filter insert and ball valves on inlet and outlet	High-quality synthetic material
	<b>Not depicted components</b>		
		Cover plate	Ductile iron (ISO 1083), powder-coated
		Diaphragm plate	Ductile iron (ISO 1083), powder-coated
		Diaphragm	EPDM
		Spring	Stainless steel
		Regulating cone	Stainless steel
		Valve seat	Stainless steel
	Compression fittings	Brass	
	Pilot valve housing	Brass	
	Filter insert	Stainless steel	
	Check valve	Brass	
	Seals	EPDM	

## METHOD OF OPERATION

Negative pressures or pressure shocks can occur in pressurised pipelines when pumps shut-off. The negative pressure or excess pressure becomes ever greater as the length of the pipework after the pump is increased.

Pump control valves of this type gradually reduce the pump to zero demand by slowly closing the valve before the pump is shut-off. Pump shut-off occurs when the electrical end switch on the valve is operated.

## TRANSPORTATION AND STORAGE

Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	5 °C
Max. ambient temperature:	55 °C
Min. ambient relative humidity:	25 % *
Max. ambient relative humidity:	85 % *

\*non condensing

## INSTALLATION GUIDELINES

### Setup requirements

- Install shut-off valves
- Install downstream of the strainer
  - Protects against damage from coarse particles
  - Note flow direction (indicated by arrow)
- The installation location should be protected against frost and be easily accessible
  - Pressure gauge can be read off easily
  - Simplified maintenance and cleaning
- The opening period is dependent on the length of the supply pipework and should be increased if this pipework is extremely long
- The valve of this type cannot prevent excess pressure such as may be caused by a sudden electrical power failure
  - For this purpose a PC300 surge anticipating valve should be fitted as well
- Requires regular maintenance in accordance with EN 806-5

**Installation Example**

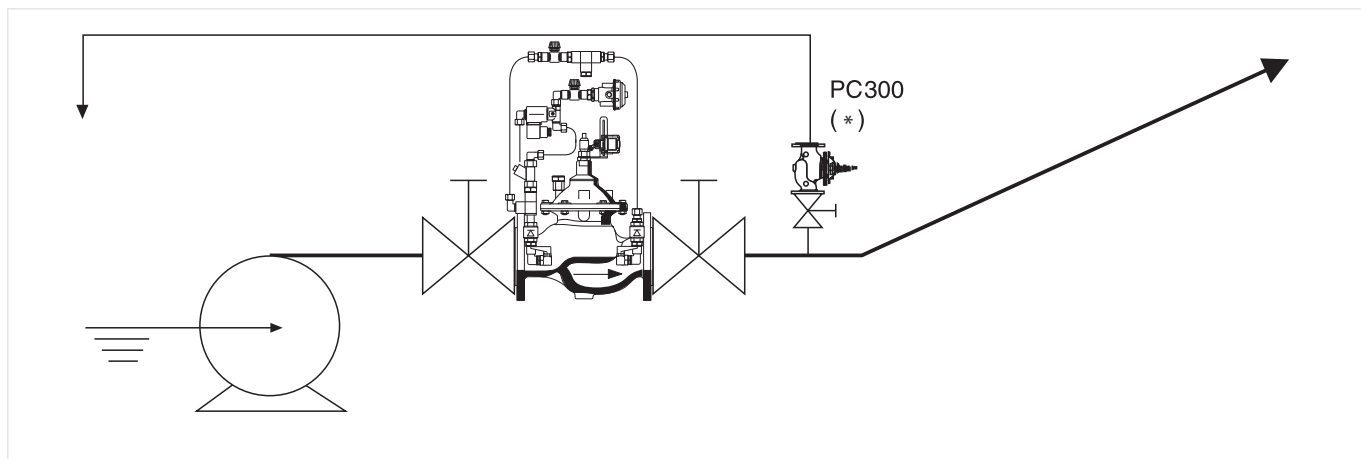


Fig. 1 Standard installation example for the pump control valve

\* optional

Connection sizes:	2"	2 1/2"	3"	4"	6"	8"	10"	12"	14"	16"	18"
Distance in mm (W*):	100	110	120	130	160	190	220	250	270	310	330

\* Required installation distances between the centerline of the pipework and the surrounding in dependency of the connection size.

**TECHNICAL CHARACTERISTICS**

**kvs-Values**

Connection sizes:	50	65	80	100	150	200	250	300	350	400	450
k <sub>VS</sub> -value (m <sup>3</sup> /h):	43	43	103	167	407	676	1160	1600	2000	3000	3150
Flow rate (Q <sub>max</sub> ) in m <sup>3</sup> /h - V=5.5 m/s:	40	40	100	160	350	620	970	1400	1900	2500	3100

**Pressure drop characteristics**


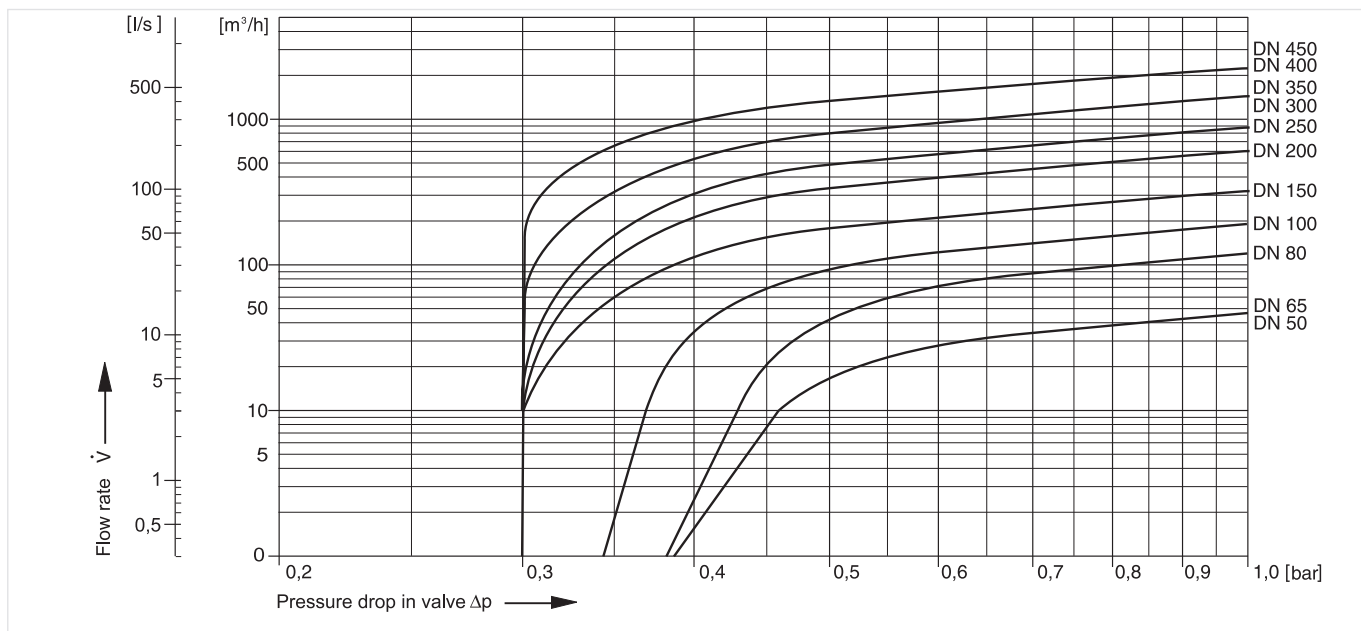


Fig. 2 Pressure drop within the valve in dependency of the flow rate and the used connection size

## DIMENSIONS

### Overview

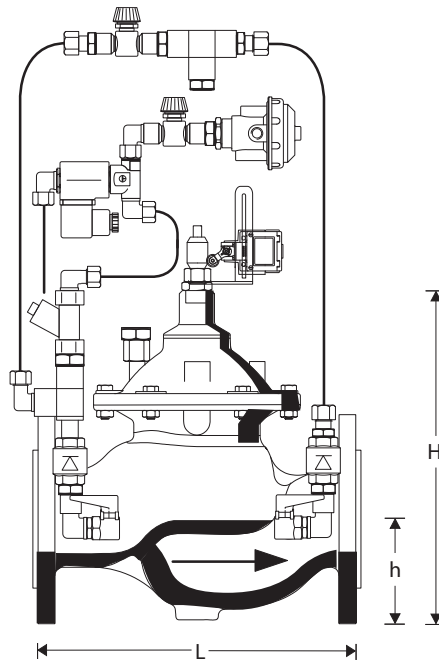

Parameter	Values											
Connection sizes:	DN	50	65	80	100	150	200	250	300	350	400	450
Weight with pilot valve:	kg	14.0	15.0	24.0	39.0	82.0	159.0	247.0	407.0	512.0	824.0	947.0
Weight without pilot valve:	kg	12.0	13.0	22.0	37.0	80.0	157.0	245.0	405.0	510.0	822.0	945.0
Dimensions:	L	230	292	310	350	480	600	730	850	980	1100	1200
	H	270	280	330	350	480	570	730	870	910	1150	1170
	h	83	93	100	110	143	173	205	230	260	290	310

Note: All dimensions in mm unless stated otherwise.

## ORDERING INFORMATION

The following tables contain all the information you need to make an order of an item of your choice. When ordering, please always state the type, the ordering or the part number.

### Options

The valve is available in the following sizes: DN50, DN65, DN80, DN100, DN150, DN200, DN250, DN300, DN350, DN400 and DN450.

- standard

		PS300-...A
Connection type:	Flange PN16, ISO 7005-2, EN 1092-2	•

Note: ... = space holder for connection size

Note: Ordering number example for DN65 and type A valve: PS300-65A

### Accessories

	Description	Dimension	Part No.
	<b>EXF125-A Extension flange DN125</b> Adapter flanges DN100 to DN125 Ductile iron, PN16 acc. ISO 7005-2 and EN 1092-2. Overall length with adapter flanges (without bolts) DN125 L=416mm, DVGW approved, including bolts, nuts and the seal disc.		
			EXF125-A

**Spare Parts**

Pump control valve PS300, from 2002 onwards

Overview	Description	Dimension	Part No.
	<b>1 Replacement magnetic solenoid valve</b>		
	Normally closed with electrical supply off 24 V	DN50 - DN450	30-NC 0903763
	<b>2 Set of seals</b>		
		DN50	0903750
		DN65	0903751
		DN80	0903752
		DN100	0903753
		DN150	0903754
		DN200	0903755
		DN250	0903756
	DN300	0903757	
	DN350	0903758	
	DN400	0903759	
	DN450	0903760	

**Environmental & Energy Solutions**

Honeywell GmbH  
 Hardhofweg  
 74821 MOSBACH  
 GERMANY  
 Phone: (49) 6261 810  
 Fax: (49) 6261 81309  
<http://ecc.emea.honeywell.com>

Manufactured for and on behalf of the  
 Environmental and Combustion Controls  
 Division of Honeywell Technologies Sàrl, Z.A.  
 La Pièce 16, 1180 Rolle, Switzerland  
 by its Authorised Representative Honeywell GmbH  
 ENOH-1333GE23 R0517  
 Subject to change  
 © 2017 Honeywell GmbH

