

OneFlow® OF110-1, OF120-2, OF140-4

Anti-Scale System

Technical Data Sheet



Description

The **OneFlow®** Anti-Scale System, **Series OF110-1, OF120-2 and OF140-4**, provides protection from scale formation on internal plumbing surfaces. The **OneFlow®** system is a single cartridge-based system that may be installed on a cold water line prior to a water-using device (water heater, hot-beverage system, appliance, steamer etc.) that requires protection from the ill effects of hard water.

OneFlow® prevents scale by transforming dissolved hardness minerals into harmless, inactive microscopic crystal particles. These crystals stay suspended in the water and are passed to drain thereby having a greatly reduced ability to react negatively like dissolved hardness does. The system requires very little maintenance, no backwashing, no salt and no electricity. Typical hardness problems, especially build-up of scale in pipes, water heaters, boilers and on fixtures are no longer a concern.

OneFlow® is not a water softener. It does not add chemicals. It is a scale prevention device with proven third party laboratory test data and years of successful Food Service and Commercial applications. **OneFlow®** is the intelligent scale solution and is a great alternative to water softening (ion exchange) or scale sequestering devices.



OF110-1, OF120-2, OF140-4

Chemical free scale prevention and protection - converts hardness minerals to harmless, inactive microscopic crystals making **OneFlow®** an effective alternative technology to a water softener for the prevention of scale due to water hardness.

Virtually maintenance free - No salt bags or other chemicals to constantly add or maintain.

No control valve, no electricity and no wastewater.

Uses environmentally friendly "green" technology.

Improves efficiency of all water appliances whether heating the water or not.

Simple sizing & installation – all you need to know is pipe size and flow rate.

Perfect system for restaurants, cafeterias and coffee shops where multiple or single equipment protection is desired for longer equipment life and reduced energy consumption.

Inlet ball valve for easy isolation shutoff and filter changes.

OneFlow® does not remove the essential minerals in water that are linked to good health.

OneFlow® cartridge-based systems are easily maintained; change the cartridge once per year.

The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Type	Part No.	DN	Flow rate (l/min)	Weight (kg)
OneFlow®	OF110-1	1/2"	4	2,3
OneFlow®	OF120-2*	1/2"	8	3,6
OneFlow®	OF140-4*	3/4"	15	8,2

*disponibili a richiesta

Feed Water Chemistry Requirements	
pH	6.5÷8.5
Hardness (maximum)	75 grains (1282 ppm CaCO ₃)
Water Pressure	15 psi÷100 psi (1.03 bar to 6.9 bar)
Temperature	40°F÷110°F (5°÷43°C)
Free Chlorine	< 2 ppm
Iron (maximum)	0.3 ppm
Manganese (maximum)	0.05 ppm
Copper	1.3 ppm
Oil & H ₂ S	Must be Removed Prior to OneFlow
Polyphosphates	Must be Removed Prior to OneFlow
Silica (maximum)	20 ppm


Application

A **OneFlow**® scale prevention system shall be installed on the cold water service line to condition the tap water just prior to the service line feeding the equipment it is designed to protect. The system will be sized for maximum or peak flow rate based on the specification of said equipment. A **OneFlow**® system may also be installed to protect multiple pieces of equipment from the ill-effects of hard water scale provided the aggregate peak flow rate for each piece of equipment it is protecting has been considered. The system shall be plumbed with a bypass valve to allow isolation of filter housing to allow the bypass of untreated water in the event that service or cartridge replacement be necessary. The installation area should be suitable in size for the housing to be serviced without encumbrance and the system should be installed per the Installation, Operation & Maintenance manual as provided with each system.

The **OneFlow**® system must not require additional waste water to backwash, flush, or regenerate once put into service. The system shall not require any chemical additives and shall not require electricity for operation.

For hot water applications where water temperature is 100°F - 140°F (38°C - 60°C), please consult ES-OneFlow-Hot Water.

Copper lines need to be passivized for a minimum of 4 weeks before placing unit into service. Not for use on closed loop systems.

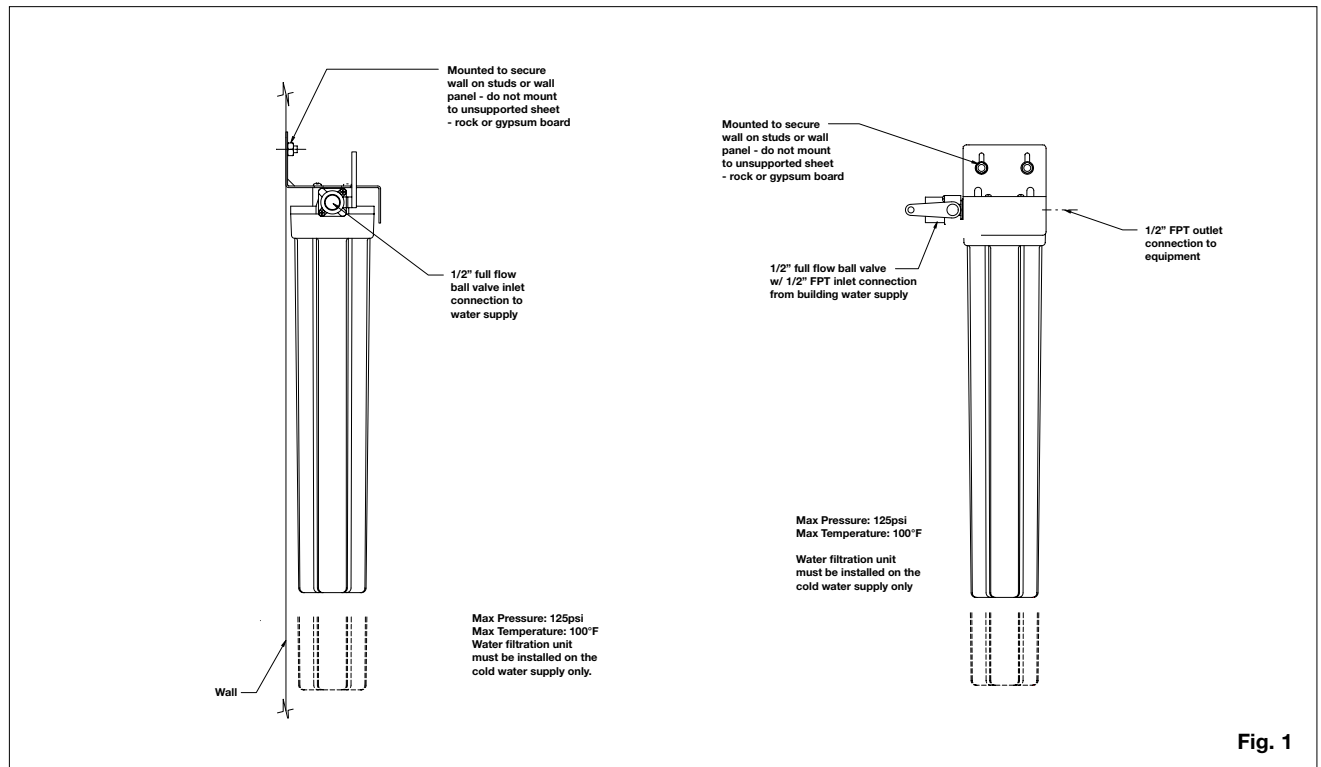


Operation

High levels of Copper will foul **OneFlow**® media and typically originates from new Copper plumbing. Wait a minimum of 4 weeks before placing system in operation. Avoid applying excess flux on the inner surfaces of the pipe and to use a low-corrosivity water soluble flux listed under the ASTM B813 standard.

OneFlow® media does not reduce silica scaling. Silica can act as a binder that makes water spots and scale residue outside the plumbing system difficult to remove. This 20 ppm limitation is for aesthetic purposes.

Series OF110-1, OF120-2, OF140-4: cartridge should be replaced every 12 months

Overall dimensions (cm)

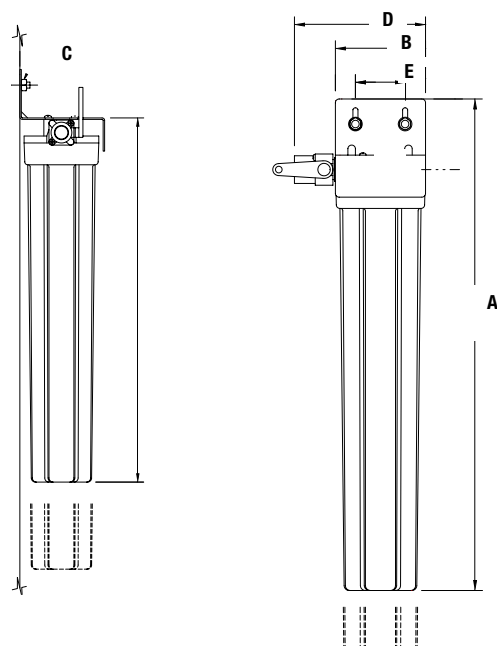

Mod.	A (cm)	B (cm)	C (cm)	D (cm)	E (cm)
OF110-1	37	11	13	17	6
OF120-2	62	11	13	17	6
OF140-4	66	20	22	25	15

The overall height and the height of the inlet fitting varies due to material variations and assembly tolerances. Please allow additional clearance above the tank for making connections.

Product text

OneFlow® Series OF110

OneFlow® Anti-Scale System, **Series OF110** - Watts brand, cartridge included. It improves efficiency of all water heating devices and downstream plumbing components, protecting from scale formation on internal and external plumbing surfaces. Maximum flow rate 4 lt/min, Max. pressure 6,9 bar; max temperature 38°C. Size 1/2".

OneFlow® Series OF120

OneFlow® Anti-Scale System, **Series OF120** - Watts brand, cartridge included. It improves efficiency of all water heating devices and downstream plumbing components, protecting from scale formation on internal and external plumbing surfaces. Maximum flow rate 8 lt/min, Max. pressure 6,9 bar; max temperature 38°C. Size 1/2".

OneFlow® Series OF140

OneFlow® Anti-Scale System, **Series OF140** - Watts brand, cartridge included. It improves efficiency of all water heating devices and downstream plumbing components, protecting from scale formation on internal and external plumbing surfaces. Maximum flow rate 15 lt/min, Max. pressure 6,9 bar; max temperature 38°C. Size 3/4".

The descriptions and photographs contained in this product specification sheet are supplied by way of information only and are not binding.

Watts Industries reserves the right to carry out any technical and design improvements to its products without prior notice. Warranty: All sales and contracts for sale are expressly conditioned on the buyer's assent to Watts terms and conditions found on its website at www.wattswater.eu. Watts hereby objects to any term, different from or additional to Watts terms, contained in any buyer communication in any form, unless agreed to in a writing signed by an officer of Watts.



Watts Industries Italia S.r.l.

Via Brenno, 21 • 20853 Biassono (MB) • Italy
Tel. +39 039 4986.1 • Fax +39 039 4986.222
infowattsititalia@wattswater.com • www.watts.com