## Leakage sensor/water ingress detector with switching output



The leakage sensor/water ingress detector  ${\bf HYGRASREG^{\circledcirc}}\,{\bf LS}$  with leakage location is used to detect water ingresses and ingresses of conductive liquids. It is designed for the early detection of water leakages to protect sensitive electrical and electronic equipment in buildings against moisture. The water ingress detector consists of an electronic monitoring system with LED status indicator, and a matching electrode, which can be extended by the user.

24 V AC (±20%) and 1536 V DC
< 1.0 VA / 24 V DC; < 2.2 VA / 24 V AC
10 95 % r. H.; 0+50 °C
conductive liquids between the probes
conductance between electrodes > threshold
potential-free changeover contact (24 V), 1 A ohmic load
plastic, UV-resistant, material polyamide, 30% glass-globe reinforced, with quick-locking screws (slotted/Phillips head combination), colour traffic white (similar to RAL 9016), housing cover is transparent!
72 x 64 x 43.3 mm (Tyr 1)
cable gland, plastic (M 16 x 1.5; with strain relief, exchangeable, inner diameter 10.4 mm) or M12 connector according to DIN EN 61076-2-101 (optional on request)
0.14 - 1.5 mm² via terminal screws
two external probes, laid according to measuring task (on the <b>LS-2</b> ) or upright on electrodes with insulating plastic caps, which are mounted on the housing underside (on the <b>LS-4</b> )
for device type LS-2 (2 electrodes 10 mm, already permanently mounted Electrode extension 15 mm, 20 mm and 30 mm, 2 pieces each, stainless steel V2A (1.4301) (enclosed) Cable sensor, $L=1$ m (optional)
III (according to EN 60 730)
IP 65 (according to EN 60529) Housing tested, TÜV SÜD, Report No. 713139052 (Tyr 1)
CE conformity, electromagnetic compatibility according to EN 61 326, EMC directive 2014/30/EU
The leak sensor can be set using DIP switches so that the relay is energised during normal operation.  This means that relay opens in the event of a fault (water damage, cable breakage, power failure).  This also enables a break in the cable to the sensor to be detected.

Schematic diagram	LS
UB+ 24V AC/DC — GND ~ GN	

Self-locking (selectable)	DIP 1
Self-locking ON	ON
Self-locking OFF	OFF
Relay status (selectable)	DIP 2
Normally open contact OPEN	ON
Normally open contact CLOSED	OFF

Connectir	ng diagram	LS
<b>◎</b> 1 <b>◎</b> 2	UB+ supply voltage 24V AC/DC UB- GND	
<b>⊘</b> 13 <b>⊘</b> 11 <b>⊘</b> 12	Normally changeover open contact [24 V]	



LS-4

LS-2







Leakage sensor/water ingress detector with switching output













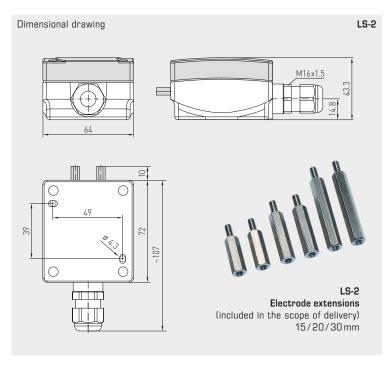

S+S REGELTECHNIK



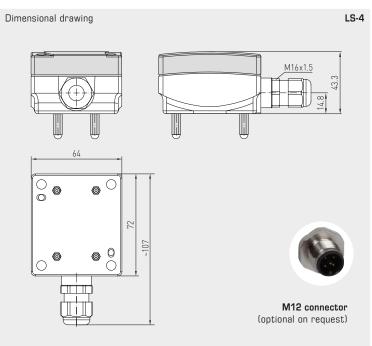



HYGRASREG® LS	Leakage sensor / water ingress detector			
Type/WG01	Detection of leakage of conductive liquids	<b>Output</b> Humidity (relative)	Item No.	Price
LS				
LS-2	Conductance > switching threshold	Changeover contact	1202-1042-0000-000	91,90 €
LS-4	Conductance > switching threshold	Changeover contact	1202-1042-0000-100	104,03 €
Optional:	Cable connection with M12 connector acco	ording to DIN EN 61076-2-101	on request	

ACCESSORIES			
LS-Kabelsonde	<b>Cable sensor</b> , $L = 1 \text{ m}$ , for device type <b>LS-2</b>	1202-1042-0000-001	22,46 €
	For further information, see last chapter Accessories!		